

Morley-IAS Repeaters

Active and Passive Fire Alarm Control Panel repeaters

The Morley-IAS repeaters are compact remote control units for Morley-IAS intelligent multi protocol fire alarm control panels.

These units, along with other I/O peripheral devices and the external printer further enhance the flexibility and functionality of our fire alarm control panel range.

The repeaters provide an extension to the operation of the fire alarm control panel. There are two types available - passive with indications only and no controls, or active with both controls and indicators. Both display the operational state of the control panel using the 80 character LCD display and the 7 LED status indicators.

In addition to the general status indicators the Active repeater is fitted with key operated "Access Enable" switch for the control functions. Individual buttons are provided for System Reset, Mute, Accept, Sound Alarms, Silence/Re-sound Alarms and Self test. Thus enabling control functions to be duplicated in strategic locations around the installation.

The Active repeater includes an integral self test sequence guiding the operator through a preset sequence to test the functionality of the control buttons, key-switch and display indicators.

Each repeater is connected to the Morley-IAS fire alarm control panels using the RS485 peripheral data port as shown in the schematic overleaf. A maximum of 31 active repeaters can be connected to the peripheral data port. The fire alarm control panel supervises the connection between itself and the repeater, proving the integrity of the cabling and indicating faults both on the repeater and the fire alarm control panel.

Passive repeaters are not supervised, but a loss of communication with the fire alarm control panel will be indicated on the passive repeater.

The repeater requires an external power supply of +24Vdc (nominal) to operate. Power may be taken from the auxillary supply of the control panel or from any other suitable dc power supply.




KEY FEATURES


- Compatible with all Morley-IAS intelligent multi-protocol fire alarm control panels
- Connects to RS485 peripheral bus
- Active or Passive options
- Backlit adjustable alphanumeric display
- General status LEDs
- Controls for system reset, accept, mute, silence alarms, and self test (active repeater only)
- "Access Enable" key-switch on active repeater

MECHANICAL



DIMENSIONS [MM] (H X W X D)	165 x 254 x 50
WEIGHT	1.7kg (approx)
OPERATING TEMPERATURE	+5°C to +45°C
RELATIVE HUMIDITY	5% - 95% non-condensing

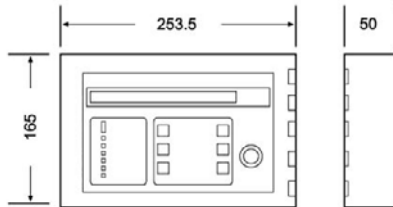

ZXr-A and ZXr-P Dimensions

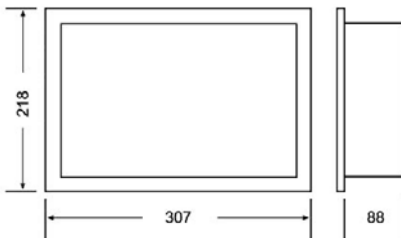

ZXr-A and ZXr-P Bezel Dimensions
Bezel cutout - 267 x 179 x 90
All dimensions in mm.

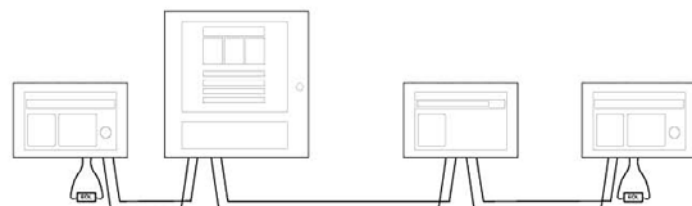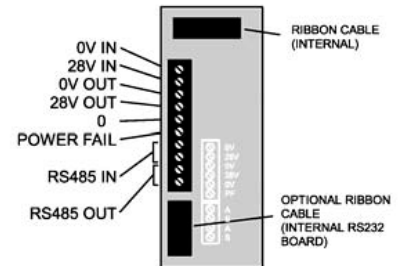

RS485 Communication Bus

ELECTRICAL

OPERATING VOLTAGE	18 to 32 Vdc
OPERATING CURRENT	90mA (Quiescent) 120m (Alarm)
TERMINALS	Maximum cross section 2.5mm ²
LED INDICATORS	Fire, Fault, Disables, Accepted, Silenced, Power, Communications, Loss
USER CONTROLS (ACTIVE) ¹	Keyswitch activated - System Reset, Sound Alarms, Silence/Resound, Mute, Accept and Self Test



709-701-001



709-752

PART NUMBERS

709-601-001	Morley-IAS Active Repeater
709-701-001	Morley-IAS Passive Repeater
709-752	Morley-IAS Stainless Steel Semi-flush Active Repeater
020-835	Spare key switch and keys for Morley-IAS repeaters
002-600-002	Bezel Kit for Active or Passive Repeater
795-004-001	RS485 Communication Module.

For more information

www.morley-ias.co.uk

Honeywell Morley IAS

Caburn House
2B Brooks Road
Lewes, E. Sussex
BN7 2BY UK

T: +44 (0) 1273 897 000
F: +44 (0) 1273 376 894
E: sales@morleyias.co.uk

For further details on these or any other Morley-IAS products please contact your local distributor, Morley-IAS Business Manager or via our contact details found below. Morley-IAS - Providing a control panel solution, for fire industry professionals, committed to supporting our device partners.



*Please contact us for full compatibility details of supported third party devices.

HMIAS_UK_Repeater | 01 | 09/16
© 2016 Honeywell International Inc.

Honeywell
MORLEY IAS
FIRE SYSTEMS